



Warranty

- 1, 5 year warranty
Replacement warranty will be provided during the warranty period if the lamp suffers quality problems.
- 2, During the warranty period, the customer shall return the damaged goods or failed parts for inspection and repair by Goldenlux. Goldenlux will then send the fixed or new parts back.
- 3, Replacement warranty will be provided once valid documents are presented.
- 4, The following circumstances will not receive replacement warranty;
 - a, Damage caused, including, but not limited to, damage from abnormal working conditions, improper usage, storage that does not conform to the instruction manual;
 - b, Dismantling, modification or improper installation or repairing of the products without Goldenlux's authorisation;
 - c, No valid documents;
 - d, Damages caused by environmental circumstances including, but not limited to, fire, flood, lightning strike, earthquake.

Web: www.goldenlux.cn
 Shenzhen Goldenlux Co., Ltd
 Niujiao Rd 1#, Yanchuan 2nd Industrial Area,
 Song'gang Town, Bao'an District, SZ, China


Tel: +86 755 2300 4469



Mail: sales@goldenlux.cn

GOLDENLUX

Installation Guide

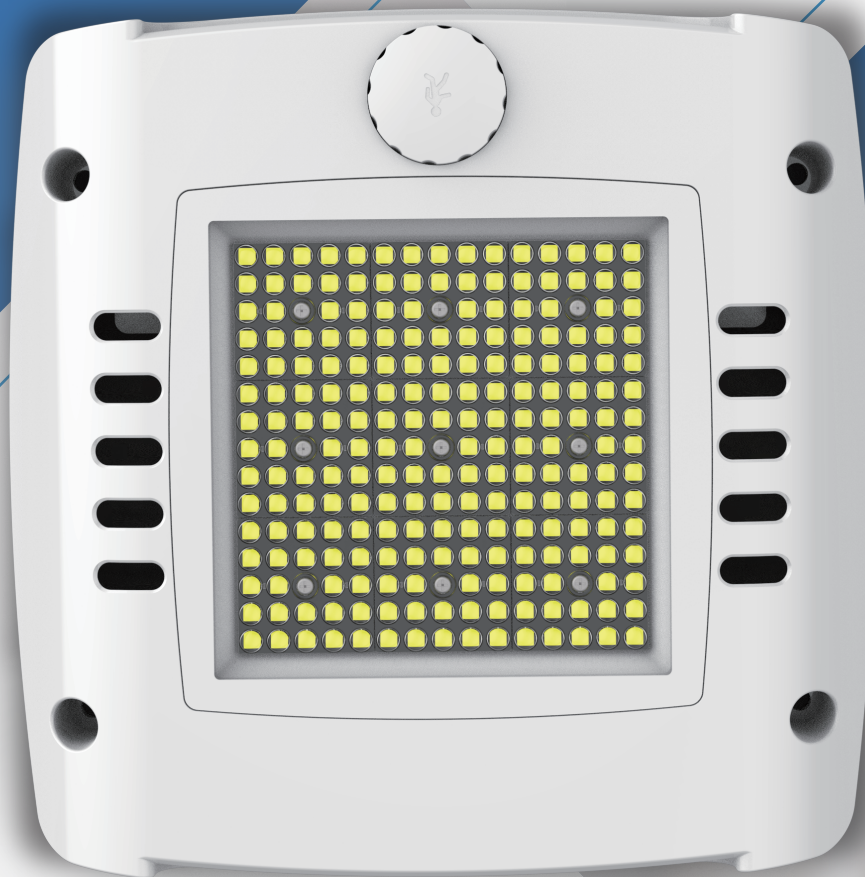

LED Canopy Light

IP65 IK08 5 years warranty




! Warning

- 1, Carefully read the installation instructions and ensure the mains supply is isolated before installation
- 2, All electrical work must be undertaken by a qualified contractor to ensure latest wiring regulations.
- 3, Disconnect power before installing or doing any maintenance.
- 4, This light should not be used in areas with limited ventilation or high ambient temperatures.

Specification:


Model No.:	GL-CL80W	GL-CL100W	GL-CL120W	GL-CL150W	GL-CL180W	GL-CL200W
Wattage:	80W	100W	120W	150W	180W	200W
Lumens:	12000lm	15000lm	18000lm	22500lm	27000lm	30000lm
Beam Angle:	30°/40°/60°/90°/120°/40x110° pc lens+glass cover					
IP Rating:	IP65	IP65	IP65	IP65	IP65	IP65
N. W:	5.1KG	5.1KG	5.3KG	5.3KG	5.5KG	5.5KG
G. W:	6.0KG	6.0KG	6.2KG	6.2KG	6.4KG	6.4KG
Product Size:	400*400*80MM					
Packing Size:	450*450*140mm					

! Fixture model and specification

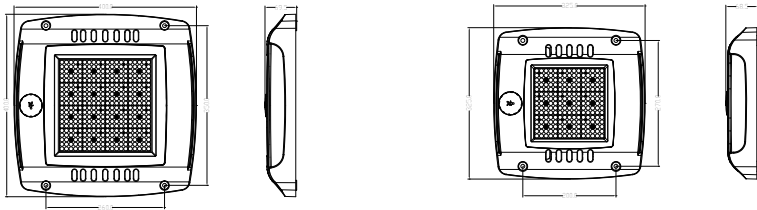

Installation


Cut off the power before the lamp connected, connect the line as follow.

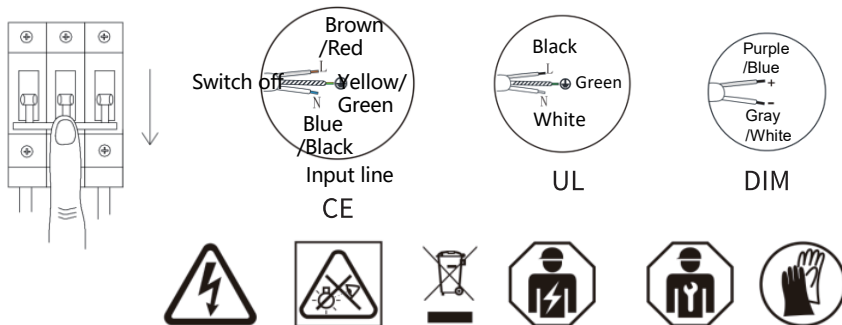


⚠ Connecting the cable requires an IP65 Tightness level

Installation diagram


- 1.The wall holes keep same as the left picture.
- 2.Using the screws and adjust the angle to fix the lamp on the wall .
- 3.According to the wiring instruction to use.




- 1.The wall holes keep same as the left picture.
- 2.Using the screws to lock the rear cover.
- 3.Put the lamp into the rear cover, locking with screw.
- 4.According to the wiring instruction to use.

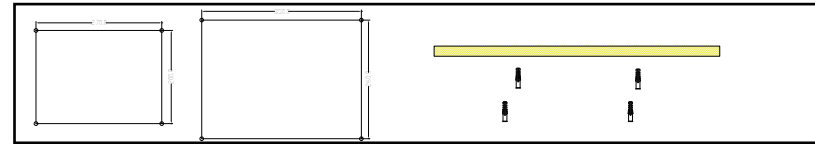

- 1.The wall holes dimension keep same as left picture.
- 2.Put the lamp in it and then locked.
- 3.According to the wiring instruction to use.



- 1.The wall holes dimension keep same as left picture.
- 2.Put the lamp in it.
- 3.According to the wiring instruction to use.



- 1.The wall holes dimension keep same as left picture.
- 2.Put the lamp in it ,lock the pole and power box.
- 3.According to the wiring instruction to use.