



Warranty

- 1, 5 year warranty
Replacement warranty will be provided during the warranty period if the lamp suffers quality problems.
- 2, During the warranty period, the customer shall return the damaged goods or failed parts for inspection and repair by Goldenlux. Goldenlux will then send the fixed or new parts back.
- 3, Replacement warranty will be provided once valid documents are presented.
- 4, The following circumstances will not receive replacement warranty;
 - a, Damage caused, including, but not limited to, damage from abnormal working conditions, improper usage, storage that does not conform to the instruction manual;
 - b, Dismantling, modification or improper installation or repairing of the products without Goldenlux's authorisation;
 - c, No valid documents;
 - d, Damages caused by environmental circumstances including, but not limited to, fire, flood, lightning strike, earthquake.

Web: www.goldenlux.cn
 Shenzhen Goldenlux Co., Ltd
 3/F Building 1, Bei Fang Yong Fa Industrial Park,
 Jincheng Road, Shajing Town, Bao'an District,
 Shenzhen, China

Tel: +86 755 2300 4469

GOLDENLUX®

Mail: sales@goldenlux.cn

GOLDENLUX

Installation Guide



LED Stadium Light

IP66 IK09 5 years warranty




! Warning

- 1, Carefully read the installation instructions and ensure the mains supply is isolated before installation
- 2, All electrical work must be undertaken by a qualified contractor to ensure latest wiring regulations.
- 3, Disconnect power before installing or doing any maintenance.
- 4, This light should not be used in areas with limited ventilation or high ambient temperatures.
- 5, The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- 6, The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.

⚡ Specification:

Model No:	GL-FL05-250W	GL-FL05-500W	GL-FL05-750W	GL-FL05-1000W	GL-FL05-1250W
Wattage:	250W	500W	750W	1000W	1250W
Lumens:	3,500LM	70,000LM	105,000LM	140,000LM	175,000LM
Beam Angle:	symmetrical Beam Angle 10°/25°/45°/60°/90°				
IP Rating:	IP66				
N.W:	5.0Kg	13.4Kg	18.1Kg	21.3Kg	27.4Kg
G.W:	5.4Kg	15.2Kg	20.3Kg	24.5Kg	30.9Kg
Product Size:	405x276x117 mm	464x512x159 mm	464x719x159 mm	464x926x159 mm	464x1133x159 mm
Carton Size:	471x300x170 mm	471x500x170 mm	471x700x170 mm	471x900x170 mm	471x1100x170 mm

⚡ Specification:

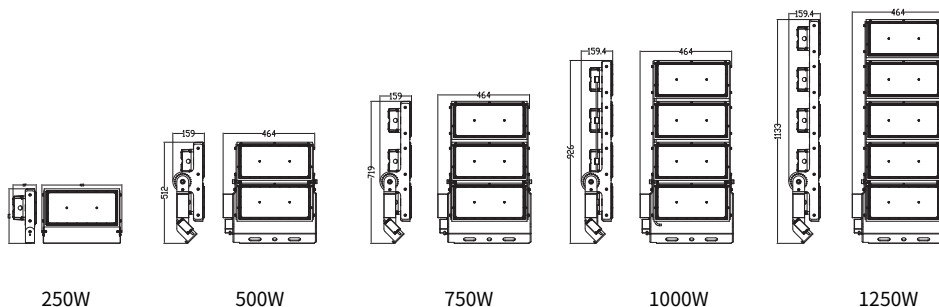


⚡ Installation Method:

Turn off the Power switch

⚠ Connecting the cable requires an IP65 Tightness level

IP66 waterproof junction box (Not equipped with lights)

Fixture input wire

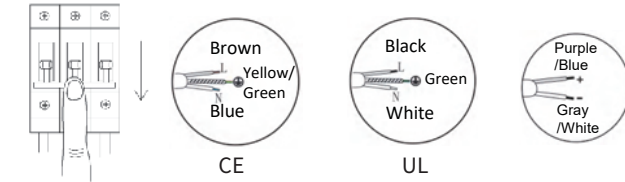

1.Lamp Fasten and Wire

