

# P-Series



## KEY ADVANTAGES

- Aesthetically pleasing line design, the whole product is slim and light
- Wattage from 60W to 200W optional
- Power Selectable (Optional)
- High energy savings compared to systems with traditional discharge lamps
- Light-on-demand feature with optional motion sensor
- Robust design
- Emergency lighting with optional battery
- High visual comfort
- No hazardous materials
- Fast ROI thanks to long life span and reduced maintenance
- Compact housing optimised for heat dissipation and reduced dust accumulation
- Dedicated range of mounting accessories

## TYPES OF APPLICATION

- CAR PARKS
- LARGE AREAS
- INDUSTRIAL HALLS & WAREHOUSES
- SPORT FACILITIES



CAR PARKS



LARGE AREAS



INDUSTRIAL HALLS & WAREHOUSES



SPORT FACILITIES



## GENERAL INFORMATION

Driver included	Yes
CE mark	Yes
RoHS compliant	Yes
SAA Mark	Yes
Safety features	Open circuit protection Short circuit protection Overvoltage protection
Testing standard	LM-79-19(all measurements in ISO17025 accredited laboratory)

## HOUSING AND FINISH

Housing	Aluminium
Optic	Polycarbonate
Protector	Polycarbonate (with integrated lenses)
Housing finish	Electrostatic polyester powder coating
Standard colour(s)	RAL 9017 black
Tightness level	IP 65
Impact resistance	IK 09

## OPERATING CONDITIONS

Operating temperature range (Ta)	-30°C to + 45°C
Operating Humidity	10-90%RH
Mounting Option	Loop Hanging Bracket Mounting
Warranty	5 years

## PERFORMANCE

Power	60W/100W/150W/200W
Efficacy	210lm/W,190lm/W, 170lm/W,150lm/W
Power Efficiency	≥93%
Start Time	≤0.2S
Warm-up time to 60%	0.5S

## ELECTRICAL INFORMATION

Electrical class	Class I EU
Nominal voltage	120-277V   50/60Hz
Power factor (at full load)	0.9
Surge protection options (kV)	6KV-Line-Line 6KV-Line-Earth
Electromagnetic compatibility (EMC)	EN 55015:2019/A11:2020, EN 61000 3-2:2019, EN 61000-3-3:2013, EN 61547:2009, EN 62493:2015
Control protocol(s)	1-10V, DALI2 (optional)
Sensor	Motion sensor (optional)
Emergency	Optional auxiliary battery
Total Harmonic Distortion(THD)	IEC 61000-3-2 Class C <20%
Driver Type	Constant current(CC)

For fixed Class 1 luminaires, overvoltage protective devices which comply with IEC 61643-11 shall be disconnected from the circuit.

withstand voltage	1.5KV 60S 10mA
-------------------	----------------

※Lamp switch must control L line or control L and N lines.

## OPTICAL INFORMATION

LED Type	SMD2835
Beam Angle	60° / 90° / 120°
Recommended installation height	4m to 12m
Color Tolerance	Ra70 ≤7 Ra80 ≤5
LED colour temperature	3000K / 4000K / 5000K / 5700K / 6500K
Colour rendering index (CRI)	CRI>70 standard CRI>80 optional
Upward Light Output Ratio (ULOR)	0%

※Ra measurement tolerance is ±2.

## LIFETIME OF THE LEDS @ TA 25°C

All configurations	
L70B50	>100,000h
L80B20	>50,000h
L90B10	>30,000h
Switching Cycles	>100,000 times

**PREMIUM VERSION**

POWER	LUMENS	EFFICACY
60W	12,600LM	210LM/W(Ra70)
	11,400LM	190LM/W(Ra80)
100W	21,000LM	210LM/W(Ra70)
	19,000LM	190LM/W(Ra80)
150W	31,500LM	210LM/W(Ra70)
	28,500LM	190LM/W(Ra80)
200W	42,000LM	210LM/W(Ra70)
	38,000LM	190LM/W(Ra80)

**PRO VERSION**

POWER	LUMENS	EFFICACY
60W	11,400LM	190LM/W(Ra70)
	10,800LM	180LM/W(Ra80)
100W	19,000LM	190LM/W(Ra70)
	18,000LM	180LM/W(Ra80)
150W	28,500LM	190LM/W(Ra70)
	27,000LM	180LM/W(Ra80)
200W	38,000LM	190LM/W(Ra70)
	36,000LM	180LM/W(Ra80)

**STANDARD VERSION**

POWER	LUMENS	EFFICACY
60W	10,200LM	170LM/W(Ra70)
	9,420LM	157LM/W(Ra80)
100W	17,000LM	170LM/W(Ra70)
	15,700LM	157LM/W(Ra80)
150W	25,500LM	170LM/W(Ra70)
	24,000LM	160LM/W(Ra80)
200W	34,000LM	170LM/W(Ra70)
	32,000LM	160LM/W(Ra80)

**ECO VERSION**


POWER	LUMENS	EFFICACY
60W	9,000LM	150LM/W(Ra70)
	8,400LM	140LM/W(Ra80)
100W	15,000LM	150LM/W(Ra70)
	14,000LM	140LM/W(Ra80)
150W	22,500LM	150LM/W(Ra70)
	21,000LM	140LM/W(Ra80)
200W	30,000LM	150LM/W(Ra70)
	28,000LM	140LM/W(Ra80)

※ The Performance Data is tested base on 230VAC, 90° and 4000K for all versions  
 ※ Power Consumption Tolerance ±5% (Apply to all versions)  
 ※ Lumen Efficiency Tolerance ±5% (Apply to all versions)


PACKAGING

POWER	PACKAGE SIZE	QTY/CTN	SINGLE PIECE VOLUME	NET WEIGHT	GROSS WEIGHT	20GP	40HQ
60W	L330*W330*H160mm	1PCS/CTN	0.0174m <sup>3</sup>	1.6kg	2.0kg	1795pcs	4069pcs
100W	L330*W330*H160mm	1PCS/CTN	0.0174m <sup>3</sup>	1.6kg	2.0kg	1795pcs	4069pcs
150W	L370*W370*H160mm	1PCS/CTN	0.0219m <sup>3</sup>	1.9kg	2.5kg	1368pcs	3100pcs
200W	L410*W410*H160mm	1PCS/CTN	0.0269m <sup>3</sup>	2.4kg	3.1kg	1130pcs	2668pcs


1795<sub>PCS</sub>  
60W/20GP




4069<sub>PCS</sub>  
60W/40HQ

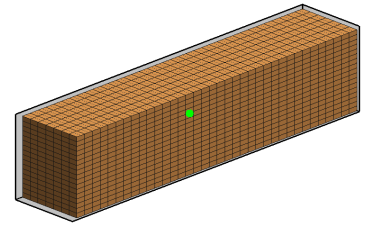


1795<sub>PCS</sub>  
100W/20GP




4069<sub>PCS</sub>  
100W/40HQ

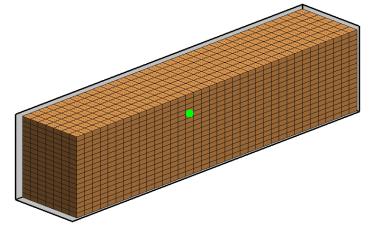


1368<sub>PCS</sub>  
150W/20GP




3100<sub>PCS</sub>  
150W/40HQ

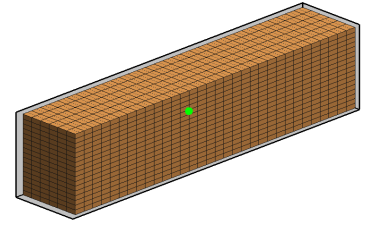


1130<sub>PCS</sub>  
200W/20GP



2668<sub>PCS</sub>  
200W/40HQ

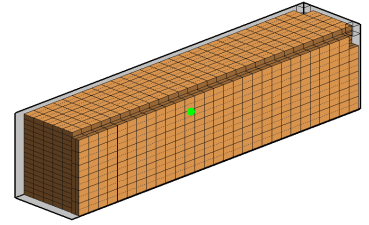

LIGHT DISTRIBUTIONS

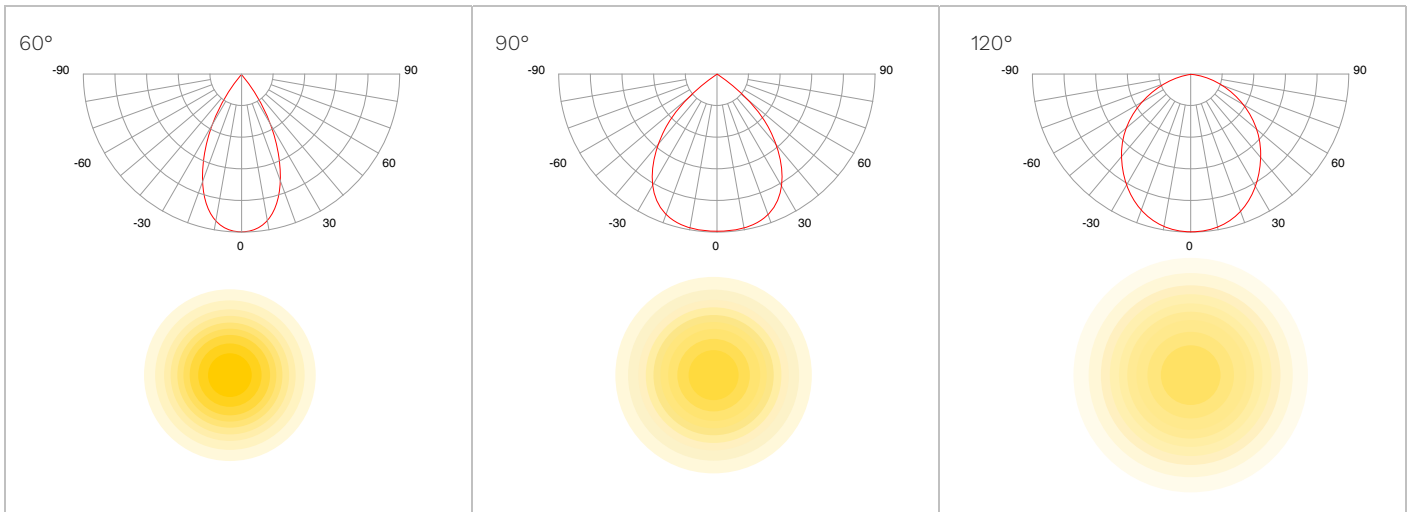

OPTIONAL

	 Philips Led Driver	 Sosen Led Driver	 Lifud Led Driver
	 60°/90° PC Lenses	 120° PC Lenses	 120° Tempered Glass



Plug & Play Center Sensor not support 120° Tempered Glass

ACCESSORIES


	 Alum Reflector (Standard)	 Alum Reflector (Tall)	 PC Reflector		
	 Universal Rotatable Bracket	 Plug & Play Center Sensor Base	 Motion Sensor	 Safety Chain	 Safe Guard

⚠ Connecting the cable requires an IP65 Tightness Level

60/100W

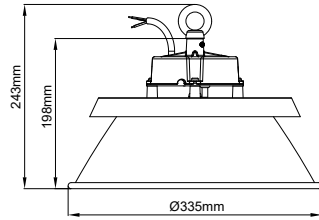



Universal Reflector

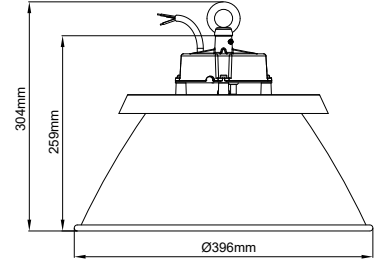


Tall Reflector

150W

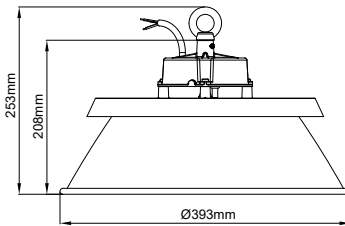



Universal Reflector

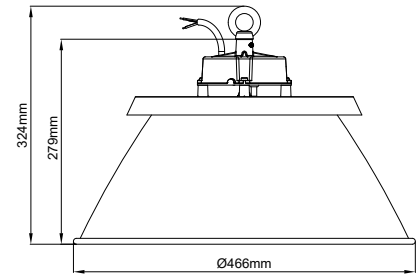


Tall Reflector

200W

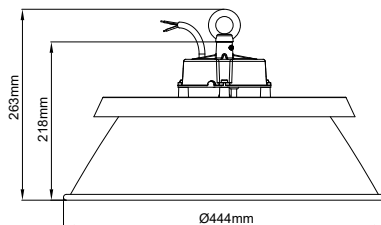

Universal Reflector

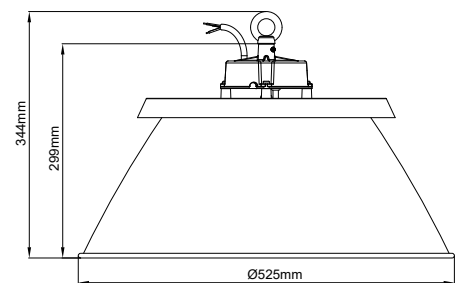

Tall Reflector